



Durco® Big Max BX2001 Valve

ASME CLASS 150 and 300 VALVES



NEW Index,
page 22



Quality
System
Certificate

Designed for Top Performance and Total Value

Bulletin V-39i

Durco BX2001

Performance Plus Economy

Equals Total Value

The Big Max BX2001 high performance valve is a superior quality, ASME Class 150 and 300 valve available in standard PFA and optional UHMWPE, fire sealed, Apex™ and TriFlex® metal seated versions. Offered in 2 in (50 mm) through 36 in (900 mm) sizes and in both wafer and lug body designs, all are available with a wide variety of packing options to meet your routine or most rigid service requirements.

Total Quality

BX2001 effectively contains fugitive process media emissions regulated by the federal Clean Air Act, including chlorine, hydrofluoric acid and anhydrous HCl. Ideal choice for precise throttling control or on-off service with lighter weight piping systems and less expensive, energy efficient actuators.

Superior Features

- Primary stem seal plus two optional secondary seals provide triple leak protection.
- Retainer is locked in the valve body by a unique lock or fasteners, depending on size.
- Adjustable, live-loaded packing option is available.
- Self-adjusting, self-contained, constant preload stem seal option may be specified.
- Low profile disc increases capacity and provides better flow control.
- Wide range of optional materials include: D20, DMM, DC2, DC3, DNI and DINC.

World Class Valve Performance

- All castings meet rigid ASTM standards.
- All BX2001 valves comply with ASME B16.34, ASME B16.5, ASME B16.10, MSS SP68, MSS SP61, API 598, API 607, API 609, and ISO 5752.
- All PFA seated valves and optional UHMWPE seated valves are tested in accordance with ASME B 16.34 and MSS SP61. No through or external leaks are allowed, thereby exceeding the shutoff requirements of ASME/FCI 70-2 for all classes.
- All Apex and TriFlex metal seated valves are tested to ASME/FCI 70-2 Class IV and VI, respectively, leakage rates.
- All valves available in ASME Class 150 and 300; DIN PN 10, -16, -20, -25 and -40 drilling.



Blow-out proof stem design complies with API 609 criteria to guard against catastrophic leakage and stem blow-out in the event of shaft failure.





Flats or "double D" on shaft provide positive indication of valve position and simplified adaption to automatic actuation.

Large diameter, one-piece high strength shaft reduces deflection for positive, repeatable shutoff at higher ΔP than similar valves.

Independent packing set adjustment prevents stem seal emissions.

Wide choice of packing materials including adjustable and self-adjusting live-loaded with leak detection port or purge fittings for lethal, toxic or sub zero services.

Positioning holes on wafer body allow easy installation and proper alignment between flanges.

Poly Lube® bearings or optional Severe Service bearings both offer low torque and high cycle life.

360° O-ring squarely and securely locks retainer ring into valve body. Full coverage retainer ring allows complete compatibility with all gaskets and no interruption in the sealing surface.


Integral cast overtravel disc stop is designed into the casting, not welded in place as an afterthought.

Blind bottom shaft hole eliminates potential leak point.

Compact construction allows installation in tight spaces.

Economical, simplified field repair due to minimum parts, interchangeable disc and shaft, and simple assembly procedures.

All carbon steel bodies electrostatic epoxy coated for enhanced corrosion protection.

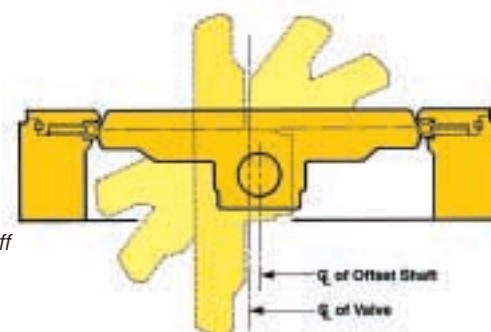

The BX2001's double offset disc creates an eccentric seating action which eliminates seat wear, reduces torque and allows disc to "cam" into seat for tight shutoff.



Poly Lube® Bearings

A patented fiberglass weaving/winding process results in a seamless filament-wound fiberglass. Fluoropolymer superfilaments with tensile strengths twenty times greater than PTFE resins are integrated into the bearing and chemically bonded with a proprietary epoxy. A low friction coefficient and high load-carrying capacity are the natural benefits of this bearing. Flowserve tested to 400°F (204°C).



Severe Service Bearings

The special PTFE resin is pressure molded onto a perforated 316 SS sheet. The perforations lock the PTFE onto the 316 SS making a unified bearing that exhibits high corrosion resistance with unparalleled cycle life. This process results in a PTFE/SS bearing where high radial and lateral loads will not deform the PTFE and strip it from its stainless steel backing. Particularly suited for environments detrimental to glass fibers or epoxies.



PFA/Viton® A energized seat provides positive, bidirectional shutoff with long cycle life on low pressure and vacuum, and high ΔP services. (See page 5 for more information about seating.)




Unique, high strength Gibb pin positively locks valve shaft to the disc. Gibb pin is used on 2 in (50 mm) through 12 in (300 mm) sizes.

BX2001 Seat Design Options

ASME Class 150 and 300 Valves

Flowserve offers a wide variety of seat design options to most cost-effectively suit your service requirements.

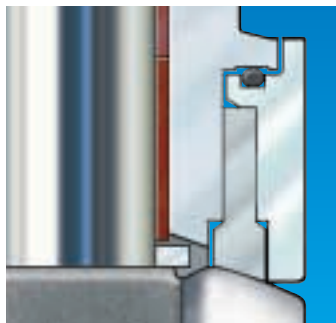


UHMWPE seat


UHMWPE Seats

For Abrasive Services

BX valves with ultra high molecular weight polyethylene (UHMWPE) seats provide long-lasting performance in erosive/abrasive services. UHMWPE seats are rated for services to 200°F (93°C).

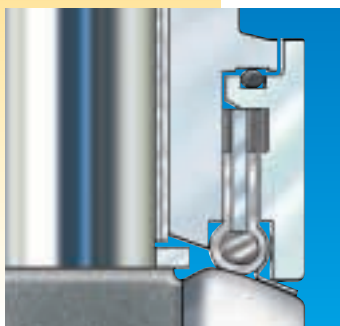


Primary seat before fire

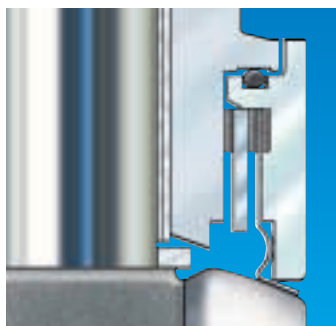

Metal seat after fire

Fire Sealed Valves

The fire sealed version BX2001 meets API 607 Requirements. If a fire destroys the PFA/Viton O-ring energized primary seat, the Inconel X750 metal backup seat activates to provide positive sealing.

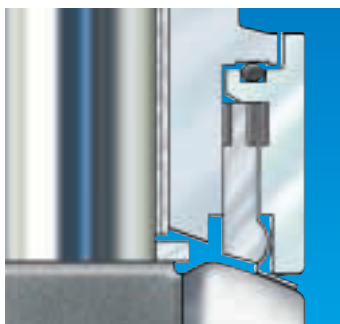


-20°F (-6°C) to 400°F (205°C)




400°F (205°C) to 600°F (315°C)

Apex Metal Seated Valves

Inconel seat assures Class IV shut-off and abrasion resistance. Grafoil gaskets provide secondary sealing. Viton ring locks retainer ring into valve body on designs to 400°F (205°C); Inconel lock wire >400°F (>205°C) to 600°F (315°C).

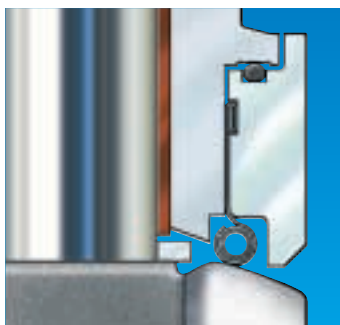

-20°F (-6°C) to 400°F (205°C)

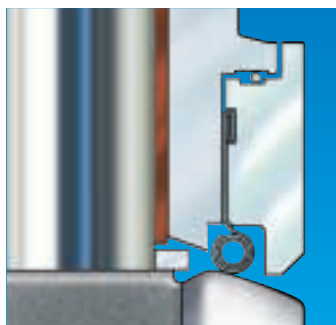

+ 400°F (205°C) high temperature

TriFlex Metal Seated Valves

TriFlex utilizes various seat designs including the sleeve and coil action of three individual springs and an Inconel spring. The metal seat plus the energizing force of process fluid pressure provide outstanding shutoff service. These highly resilient springs also offer excellent corrosion and abrasion resistance for extended service life to 1000°F (538°C).


BX2001

Stuffing Box


Packing Options

ASME Class 150 and 300 Valves


Soft Seated Valves

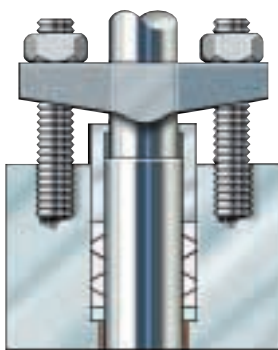


Standard, single PTFE cup and cone

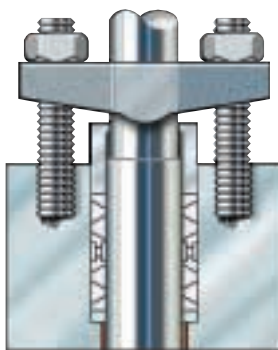


Double PTFE cup and cone with lantern ring

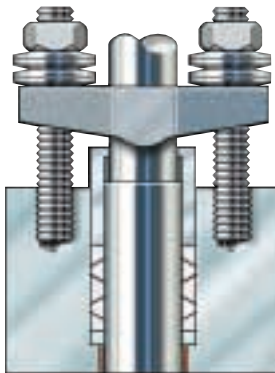


Live loaded, single PTFE cup and cone (adjustable)

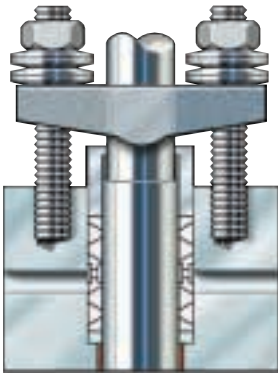

Live loaded, double PTFE cup and cone with lantern ring (purge ports are an additional option)

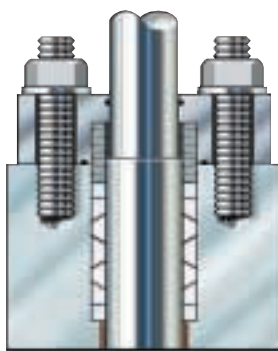

Triple seal, single PTFE cup and cone (self-adjusting/self-contained), 2 in (50 mm) – 12 in (300 mm) ASME Class 150 only

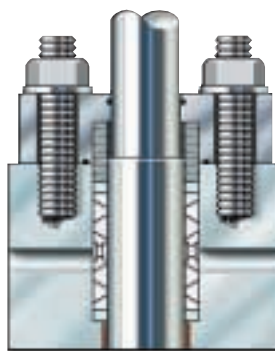


Triple seal, double PTFE cup and cone (self-adjusting/self-contained) with lantern ring, 2 in (50 mm) – 12 in (300 mm) ASME Class 150 only (purge ports are an additional option)


Fire Sealed Valves

Shaft packing and gaskets are made of Grafoil to prevent both through and external leakage. Shaft packing performance is enhanced by the Durco rocker arm adjuster.

Notes: The use of lug body style is recommended for fire sealed valves. The use of Belleville washers is not recommended with preformed pure graphite packing rings.

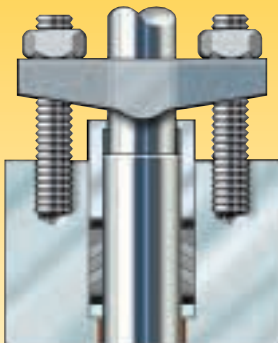


Standard, single Grafoil

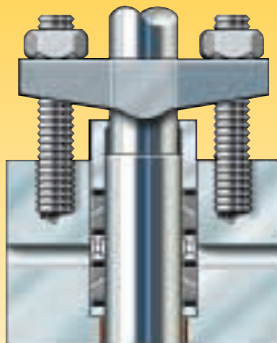

Optional double Grafoil with lantern ring (purge ports are an option)

TriFlex and Apex BX2 Metal Seat Valves

- To 400°F (205°C) **standard**, single PTFE cup and cone (adjustable). Optional live loading available (Shown at right.)
- To 400°F (205°C) double PTFE cup and cone with lantern ring (adjustable). Optional live loading available (Shown at right.)
- To 600°F (315°C) (TriFlex to 1000°F [538°C]) **standard**, single Grafoil packing set (Shown below right.)

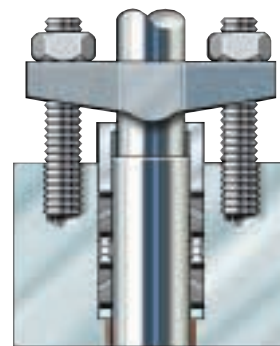

- To 600°F (315°C) (TriFlex to 1000°F [538°C]) double Grafoil with lantern ring

Note: All lantern ring packings on this page are illustrated with two optional 1/8 in (3 mm) NPT purge connections. One 1/8 in (3 mm) bleed or injection port is also available.

Durco BX2 Apex Metal Seated Valves Provide Class IV Shut-Off To 600°F (315°C)

Durco's Apex metal seats are all about high performance economy in abrasive, dirty and/or high temperature applications. These HPBV Big Max valves bridge the performance gap between standard soft seated BX2 Pressure Class 150 and 300 and the critical service requirements of TriFlex metal seated valves with Class VI shut-off capability.

Economy and performance

Apex Pressure Class 150 and 300 valves are offered in two models:

- To 400°F (205°C)
- To 600°F (315°C)

Apex metal seated valves offer all the benefits of Big Max HPBVs plus more.

- Meets ASME/FCI 70-2 Class IV leakage rate criteria
- Bi-directional seating
- Blow-out proof stem to API 609
- Easy seat replacement

- Offered in 2 in (50 mm) thru 36 in (900 mm) sizes
- Inherently fire-safe by design (>400°F [205°C])
- Exceptional cycling performance
- Reasonable seating/unseating torque

Apex BX2 design to 600°F (315°C)

The BX2 design to 600°F (315°C) features single Grafoil® packing, hard chrome plated 316 SS bearings and an Inconel® lock wire on the retainer ring.



® Grafoil is a registered trademark of Union Carbide Corporation

® Inconel is a registered trademark of the International Nickel Co., Inc.

Durco BX2 TriFlex Metal Seated Valves For High Temperature Services To 1000°F (538°C)

Three models offered

TriFlex Pressure Class 150 and 300 valves may be specified in a choice of four models:

- Standard to 400°F (205°C)
- Intermediate to 600°F (315°C)
- High temperature to 800°F (427°C)
- Modified high temperature to 1000°F (538°C)

Exceptional service life

TriFlex provides extended service life because of carefully selected high performance seat materials and the eccentric disc action of CF-8M (316 SS) hardened electro-nickel coated discs. Abrasive wear is greatly reduced.

Metal-to-metal sealing

TriFlex utilizes the sleeve and coil action of three individual springs plus the energizing force of process fluid pressure to provide outstanding shut-off service. These highly resilient springs also offer excellent corrosion and abrasion resistance for extended service life.

Additional design and materials notes

- TriFlex BX2 metal seats for services to 800°F (425°C)
 - Hard chrome plated 316 SS bearings
 - Single Grafoil packing
 - Type XM-19 SS shaft, thrust bearing and washer
- TriFlex BX2 valves for services to 1000°F (538°C)
 - Special bill of materials. Consult factory.

TriFlex BX2 design to 400°F (205°C)

The BX2 design to 400°F (205°C) features single PTFE cup and cone packing, PTFE/fiberglass bearings and an Inconel lock ring.



BX2001

Technical Data

ASME Class 150 and 300 Valves

Standard Big Max valves with PTFE packing and PFA or UHMWPE seats are rated for Vacuum Service to .02 mm Hg absolute pressure or 20 microns at ambient temperature. For vacuum services beyond this, please consult your Flowserve Sales Representative.

Seat Recommended Service Temperatures for best performance

- PFA/Viton -10°F (-23°C)/550°F (288°C)
- PFA/Silicone -100°F (-73°C)/550°F (288°C)
- PFA/Inconel -100°F (-73°C)/550°F (288°C)
- Inconel Apex -100°F (-73°C)/600°F (315°C)
- Inconel TriFlex -100°F (-73°C)/1000°F (538°C)


Valve Standards* Applicable to the BX2001

Specification	Title
ASME B16.10	Valves – face-to-face dimensions
ASME B16.34	Valves – flanged and butt-welding end
ASME B16.5	Pipe flanges and flanged fittings
ASME/FCI 70-2	American National standard for control valve seat leakage
MSS SP68	High Pressure – offset seat butterfly valves
ISO 5752	Metal valves for use in flanged pipe systems – face-to-face & center-to-face dimensions
API 609	Butterfly valves, lug-type and wafer-type
MSS SP61	Pressure Testing
API 607	Fire Test procedures and leakage requirements
NACE MR-01-75	Flowserve Corporation can furnish valves to this specification with modifications to our standard bill of materials.
United States Coast Guard	Flowserve Corporation is listed with The U.S. Department of Transportation, United States Coast Guard as an acceptable manufacturer of valves and has received an affidavit listing for valves.


*Other specifications may apply and those listed may be only partially applicable. Each should be evaluated on a case by case basis. Contact Flowserve with your particular requirements.

Pressure/Temperature Ratings†

PFA, UHMWPE and Fire-Sealed Seats^{①②}

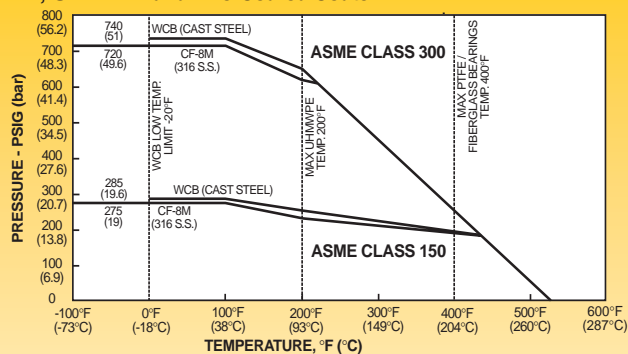

Apex and TriFlex^③ Metal Seats^②

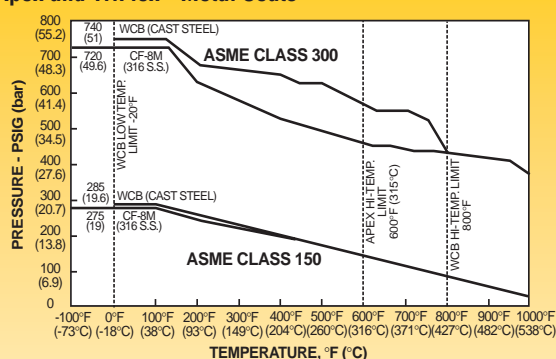


†Values given are in accordance with ASME B16.34, 1998 Edition. For materials of construction or temperatures other than those listed, consult the factory as the pressure-temperature ratings may vary.

①BX2L4 valves rated to 150 psi with retainer ring unsupported.

②BX2L1/BX2L3 designs are not rated for end-of-line service unless retainer ring is supported by a mating flange. For services requiring end-of-line with retainer ring unsupported, specify BX2L4 design.

③Must be installed with seat up stream.


Fire Sealed Valve

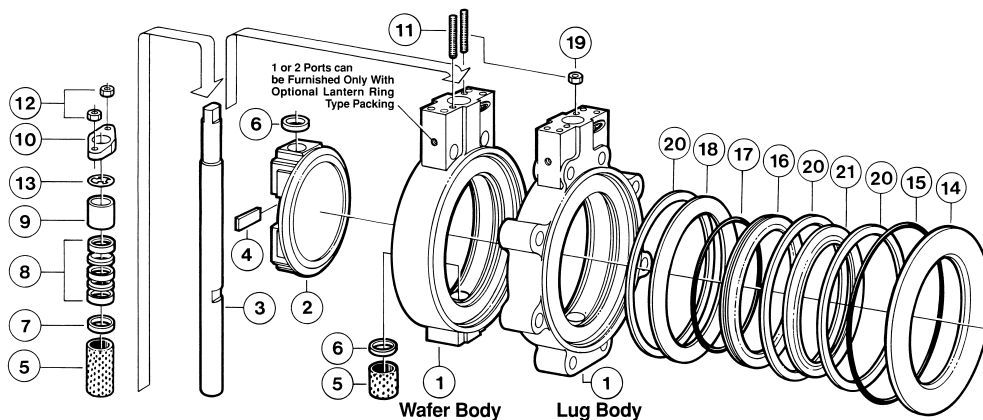


BX2001 Parts List - Standard, Fire Sealed and End Of Line Lug Valves

2 in (50 mm) Thru 12 in (300 mm) Sizes

Standard Valve

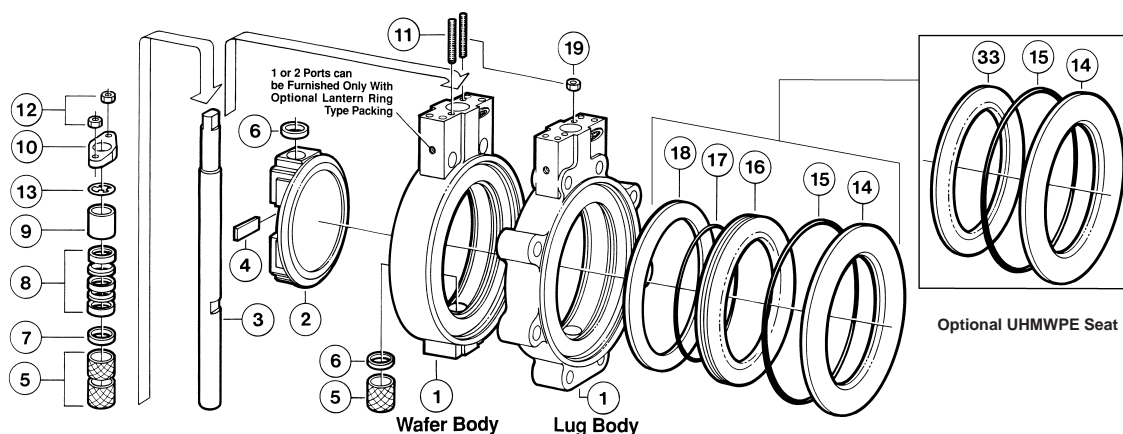

End Of Line Lug Valve

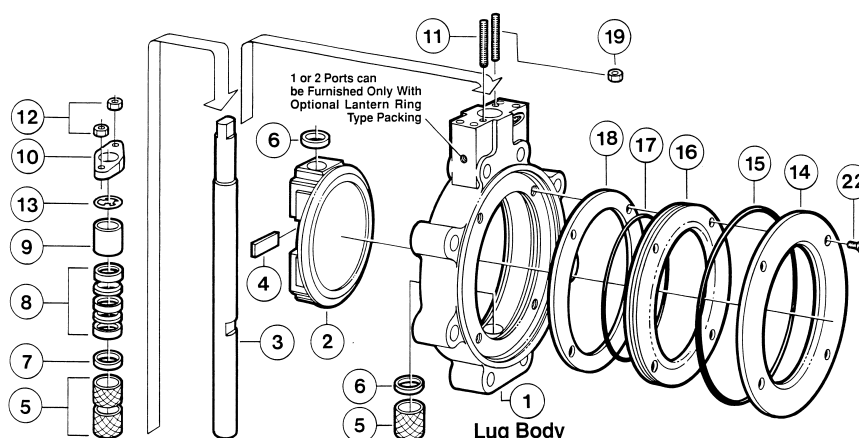

Item No.	Description	Qty.	Carbon Steel	Stainless Steel
1	Body	1	ASTM A216 Gr. WCB	ASTM A351 Gr. CF-8M
2	Disc	1	ASTM A351 Gr. CF-8M	ASTM A351 Gr. CF-8M
3	Shaft	1	ASTM A564 Type 630 17-4 SS	ASTM A564 Type 630 17-4 SS
4	Pin	1	ASTM A564 Type 630 17-4 SS	ASTM A564 Type 630 17-4 SS
5	Bearing	†	Teflon/Fiberglass (■ PTFE/316 SS)	Teflon/Fiberglass (■ PTFE/316 SS)
6	Thrust Bearing	2	ASTM A564 Type 630 17-4 SS	ASTM A564 Type 630 17-4 SS
7	Thrust Washer	1	1018 Steel	316 SS
•8	Packing Set	1	PTFE Cup and Cone (■ Grafoil)	PTFE Cup and Cone (■ Grafoil)
9	Gland	1	303 SS	303 SS
10	Adjuster	1	ASTM A351 Gr. CD4MCu	ASTM A351 Gr. CD4MCu
11	Stud-Adjuster	2	B8M3 (■ Gr. B-7)	B8M3 (■ Gr. B-7)
12	Nut-Adjuster	2	Gr. 8 (■ Gr. 2H)	Gr. 8 (■ Gr. 2H)
13	Ground Spring	1	302 SS	302 SS
14	Retainer Ring	1	ASTM A516 Gr. 70 Carbon Steel	ASTM A240 Type 316 SS
•15	Lock Ring	1	Viton A**	Viton A
•16	Seat	1	PFA	PFA
•17	Seat Energizer	1	Viton A**	Viton A
18	Seat Ring	1	1020 Steel	ASTM A240 Type 316 SS
19	Jam Nut	1	300 Series SS	300 Series SS
•20	Gasket-Fire Seal	3	■ Grafoil***	■ Grafoil
•21	Seat-Fire Seal	1	■ Inconel X750	■ Inconel X750
22	Capscrew	As Req'd	Chrome Steel	Chrome Steel
•33	Seat	1	UHMWPE	UHMWPE

* 2 in (50 mm) through 8 in (200 mm) have 2 upper and 1 lower bearing, 10 in (250 mm) and 12 in (300 mm) have 3 upper and 2 lower bearings as standard. All Fire Sealed have 1 upper and 1 lower bearing. **Registered trademark of DuPont Company. ***Registered trademark of Union Carbide. ■ Materials for Fire Sealed valves only. • Recommended spare parts.

BX2001 Parts List - TriFlex Valve 2 in (50 mm) Thru 12 in (300 mm) Sizes


Item No.	Description	Qty.	Carbon Steel	Stainless Steel
1	Body	1	ASTM A216 Gr. WCB	ASTM A351 Gr. CF-8M
2	Disc	1	ASTM A351 Gr. CF-8M (ENC)	ASTM A351 Gr. CF-8M (ENC)
3	Shaft	1	ASTM A564 Type 630 17-4 SS to 600°F ASTM A479 Type XM19 SS - 601 to 1000°F	ASTM A564 Type 630 17-4 SS to 600°F ASTM A479 Type XM19 SS - 601 To 1000°F
4	Pin	1	ASTM A564 Type 630 17-4 SS to 600°F ASTM A479 Type XM19 SS - 601 to 1000°F	ASTM A564 Type 630 17-4 SS to 600°F ASTM A479 Type XM19 SS - 601 to 1000°F
5	Bearing	2	Teflon/Fiberglass - to 400°F 316 SS Chrome Plated - 400 to 1000°F	Teflon/Fiberglass - to 400 Deg. F 316 SS Chrome Plated - 400 to 1000°F
6	Thrust Bearing	2	ASTM Type 630 17-4 SS to 600°F ASTM A479 Type XM19 SS - 601 to 1000°F	ASTM Type 630 17-4 SS to 600°F ASTM A479 Type XM19 SS - 601 to 1000°F
7	Thrust Washer	2	1018 Steel to 600°F ASTM A479 Type XM19 SS - 601 to 1000°F	316 SS to 600°F ASTM A479 Type XM19 SS - 601 to 1000°F
8	Packing Set	1	PTFE Cup and Cone to 400°F Grafoil - 400 to 1000°F	PTFE Cup and Cone to 400°F Grafoil - 400 to 1000°F
9	Gland	1	303 SS	303 SS
10	Adjuster	1	ASTM A351 Gr. CD4MCu	ASTM A351 Gr. CD4MCu
11	Stud-Adjuster	2	Gr. B-7	Gr. B-7
12	Nut-Adjuster	2	Gr. 2H	Gr. 2H
13	Ground Spring	1	302 SS	302 SS
14	Retainer Ring	1	ASTM A516 Gr. 70 Carbon Steel	ASTM A240 Type 316 SS
15	Lock/Seal Ring Retainer*	1	Inconel / Viton A**	Inconel / Viton A**
16	Seat	1	Inconel X750 Std. - Others as specified	Inconel X750 Std. - Others as specified
17	Seat Energizer	1	Viton A**	Viton A
18	Seat Ring	1	1020 Steel	ASTM A240 Type 316 SS
19	Jam Nut	1	300 Series SS	300 Series SS
22	Capscrew	As Req'd	Chrome Steel	Chrome Steel

* Retainer seal is used on End Of Line Valves.

**Viton A is a registered trademark of DuPont Company.

• Recommended spare parts.


TriFlex Valve

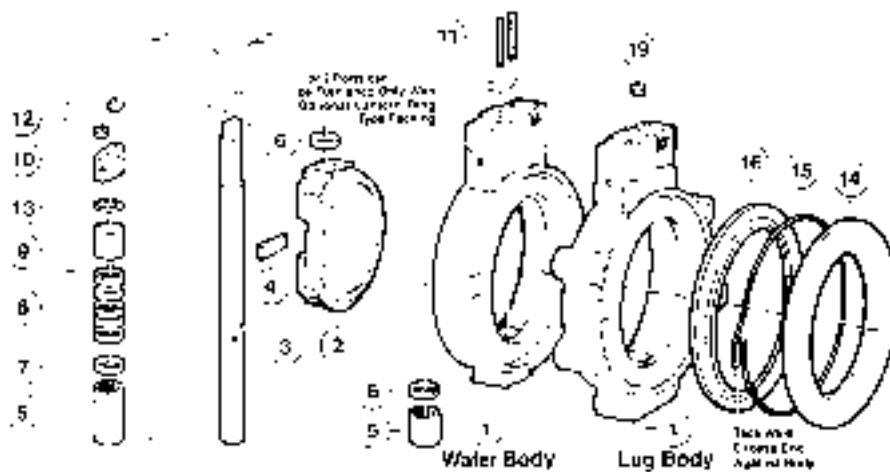

BX2001 Parts List - Apex Valve 2 in (50 mm) Thru 12 in (300 mm) Sizes

Item No.	Description	Qty.	Carbon Steel	Stainless Steel
1	Body	1	ASTM A216 Gr. WCB	ASTM A351 Gr. CF-8M
2	Disc	1	ASTM A351 Gr. CF-8M (ENC)	ASTM A351 Gr. CF-8M (ENC)
3	Shaft	1	ASTM A564 Type 630 17-4 SS	ASTM A564 Type 630 17-4 SS
4	Pin	1	ASTM A564 Type 630 17-4 SS	ASTM A564 Type 630 17-4 SS
5	Bearing	2	316 SS Chrome Plated	316 SS Chrome Plated
6	Thrust Bearing	2	ASTM Type 630 17-4 SS	ASTM Type 630 17-4 SS
7	Thrust Washer	2	1018 Steel	316 SS
8	Packing Set	1	PTFE Cup and Cone to 400°F Grafoil - 400 to 600°F	PTFE Cup and Cone to 400°F Grafoil - 400 to 600°F
9	Gland	1	303 SS	303 SS
10	Adjuster	1	ASTM A351 Gr. CD4MCu	ASTM A351 Gr. CD4MCu
11	Stud-Adjuster	2	Gr. B-7	Gr. B-7
12	Nut-Adjuster	2	Gr. 2H	Gr. 2H
13	Ground Spring	1	302 SS	302 SS
14	Retainer Ring	1	ASTM A516 Gr. 70 Carbon Steel	ASTM A240 Type 316 SS
15	Lock Ring	1	Inconel	Inconel
16	Seat	1	Inconel X750 - Others as specified	Inconel X750 - Others as specified
17	Gasket	1	Grafoil	Grafoil
18	Seat Gasket	2	Grafoil	Grafoil
19	Jam Nut	1	300 Series SS	300 Series SS

Apex Valve

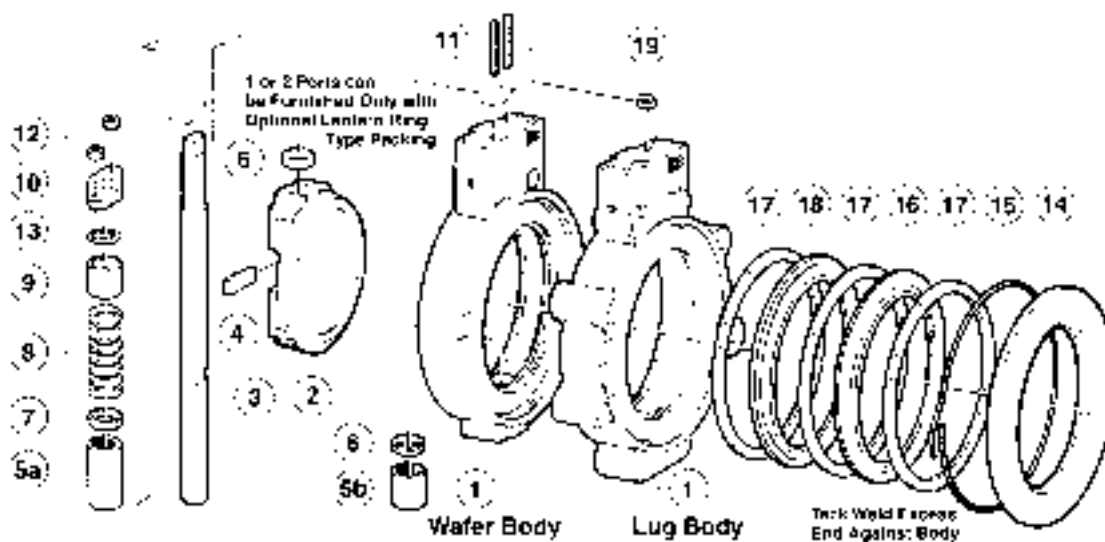

BX2001 Parts List

14 in (350 mm) Thru

36 in (900 mm) Sizes

Item No.	Description	Qty.	Carbon Steel	Stainless Steel
1	Body	1	ASTM A216 Gr. WCB	ASTM A351 Gr. CF8M
2	Disc	1	ASTM A351 Gr. CF8M	ASTM A351 Gr. CF8M
2A	Taper Pins	2	ASTM A276 Type 316 Condition B ♦ ASTM A276 Type 316 Condition B - To 600°F Monel K-500 - 600-800°F	
2B	Shaft	1	ASTM A564 UNS S17400 Type 630 ♦ For services above 600°F, shaft material will be ASTM A479 Type XM-19	
•3	Packing Set	2	PTFE (■Grafoil**) ♦ PTFE - To 400°F or Grafoil** - 400-1000°F	
4	Packing Gland	2	300 Series Stainless Steel	300 Series Stainless Steel
5	Thrust Washer	2	PTFE ♦ PTFE - To 400°F or Grafoil** - 400-800°F	
6	Packing Washer	2	Carbon Steel	316 Stainless Steel
7	Bearing Assembly	2	PTFE/Fiberglass (■Teflon/316 SS) ♦ PTFE/Fiberglass - To 400°F or 316 SS - Chrome Plated - 400-1000°F	
8	Adjuster Fastener	4	ASTM A193 Gr. B8 (■Gr. B7) ♦ ASTM A193 Gr. B8 - To 400°F or ASTM A193 Gr. B7 - 400-1000°F	
9	Packing Adjuster	1	ASTM A351 Gr. CD4M-Cu	ASTM A351 Gr. CD4M-Cu
10	Grounding Spring	1	300 Series Stainless Steel	300 Series Stainless Steel
11	Retainer Ring	1	ASTM A516 Gr. 70	ASTM A240 UNS S31600 Type 316
12	Seat Ring	1	Carbon Steel	ASTM A240 UNS S31600 Type 316
•13	Seat Energizer	1	Viton A*	Viton A*
•14	Seat	1	PFA	PFA
•15	Retainer Fastener	6	300 Series Stainless Steel	300 Series Stainless Steel
•16	Fire-Sealed Seat	1	■Inconel X750	■Inconel X750
•17	Retainer Gasket	1	■Grafoil**	■Grafoil**
•18	Seat Gasket	2	■Grafoil**	■Grafoil**
19	Jamb Nut	4	300 Series Stainless Steel	300 Series Stainless Steel
20	Thrust Bearing	2	PTFE	PTFE
21	Thrust Washer	2	300 Series Stainless Steel	300 Series Stainless Steel
22	Adjustment Stud	1	Carbon Steel - Zinc Plated	304 Stainless Steel
23	Support Stud	4	Carbon Steel - Zinc Plated	304 Stainless Steel
24	Lock Washer	4	Carbon Steel	300 Series Stainless Steel
25	Nut	4	Carbon Steel	ASTM A194 Gr. 8
26	Thrust Plate	1	Carbon Steel - Zinc Plated	304 Stainless Steel
•27	Seat	1	♦ Inconel X750 Std. - Others As specified	♦ Inconel X750 Std. - Others As specified
•28	Apex Seat	1	▲Inconel X750 Std. - Others as specified	▲Inconel X750 Std. - Others as specified
29	Seat Ring	1	▲Carbon Steel	▲ASTM A240 UNS S31600 Type 316
•30	Retainer/Seat Gaskets	3	▲Grafoil**	▲Grafoil**

■ Materials for Fire Sealed valves only

♦ Materials for TriFlex valves only

▲ Materials for Apex Seat valves only

• Recommended spare parts


* Registered trademark of DuPont Company

** Registered trademark of Union Carbide

BX2001 Parts List 20 in (500 mm) Class 300


Item No.	Description	Qty.	Material
17	Bottom Cap	1	ASTM A516 Gr. 70 or ASTM A240 UNS S31600
18	Bottom Cap Gasket	1	TFM Fluoropolymer Gr. 1600
19	Bottom Cap Fastener	6	ASTM A193 Gr. B8M2 or B8M3
20	Bearing Cap	1	Type 316 SS
21	Bearing Cap Fastener	2	ASTM A193 Gr. B8M2 or B8M3
22	Thrust Bearing	2	TFM Fluoropolymer Gr. 1600

Standard Valve

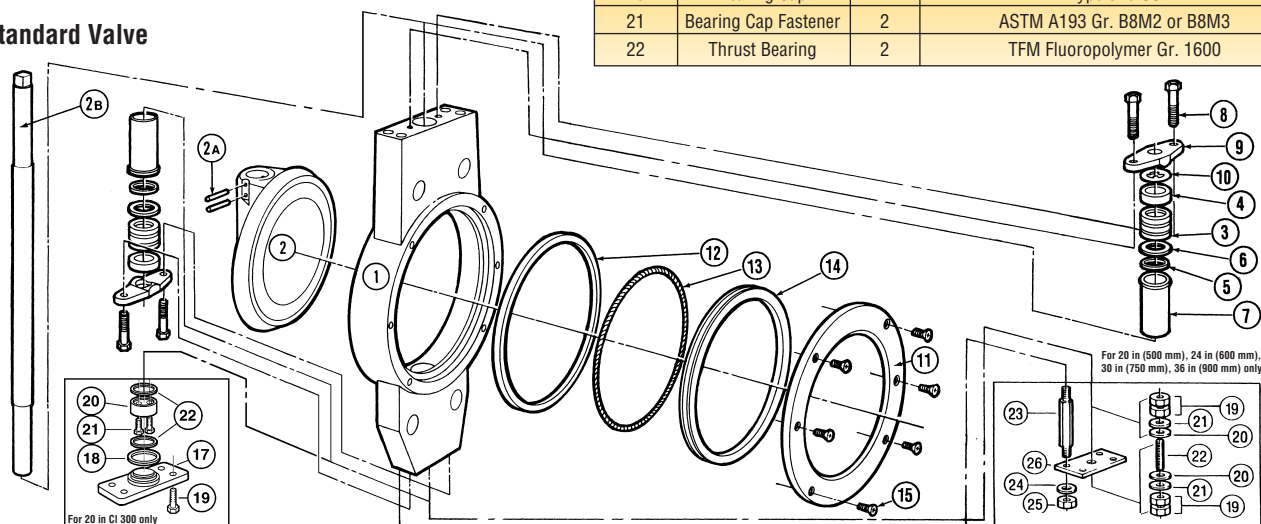


BX2001 Parts List14 in (350 mm) Thru36 in (900 mm) Sizes


Fire Sealed Valve

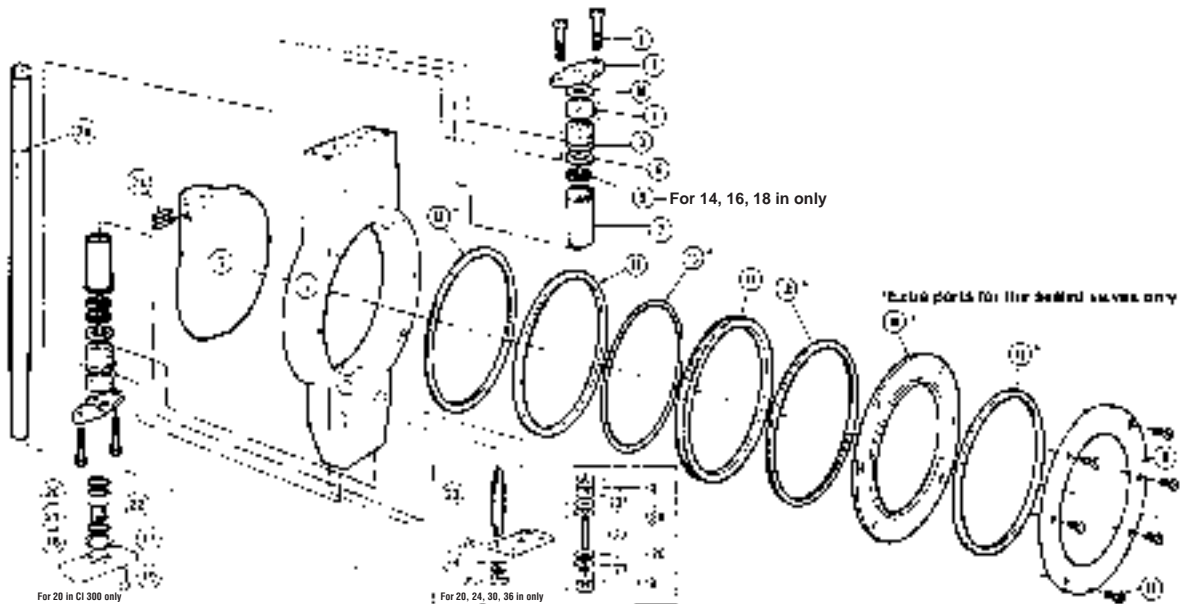

TriFlex Seated Valve

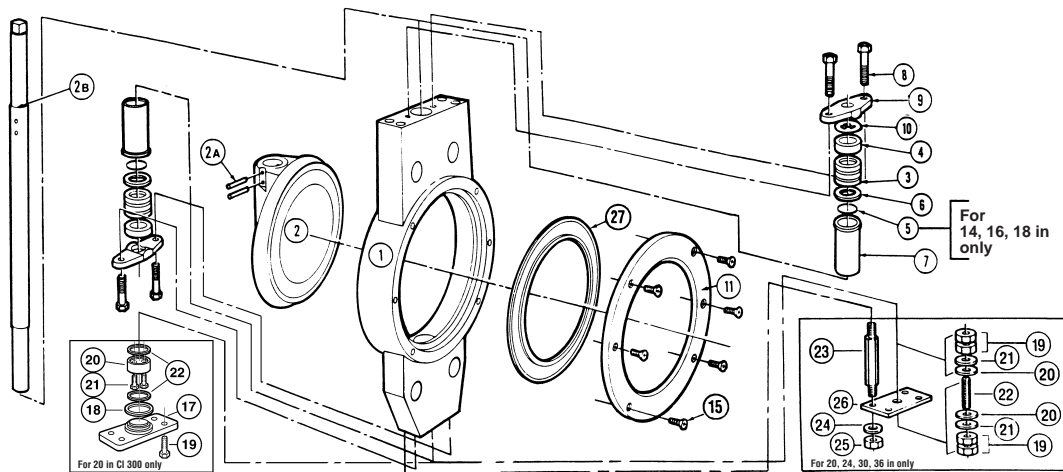

Apex Seated Valve









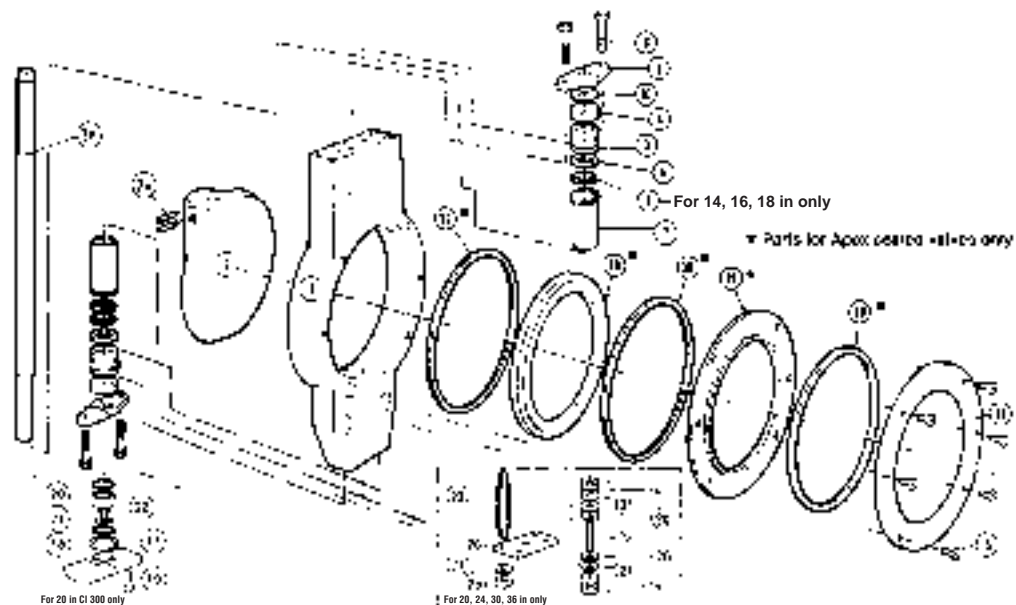


BX2001

Dimensions for Valves with Actuators

The Durco Big Max

BX2001 valve is designed for installation between ASME B16.5 Class 150 and 300 flanges. All styles of metallic flanges are permissible if clearance is provided for the swing of the disc. Install the valve with the disc in the closed position. Valve should be centered between flanges in order that the disc does not hit the flange/pipe when the valve is opened.

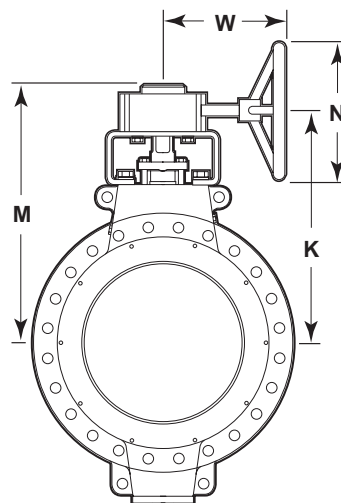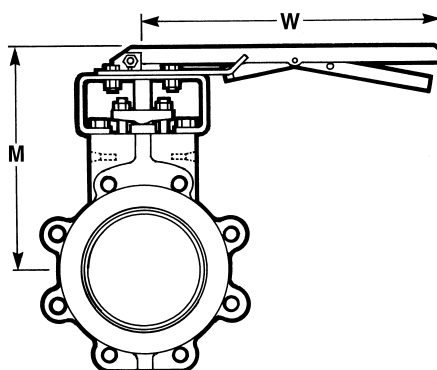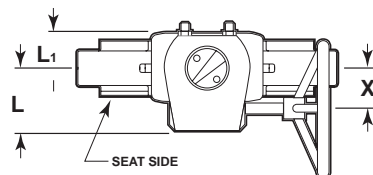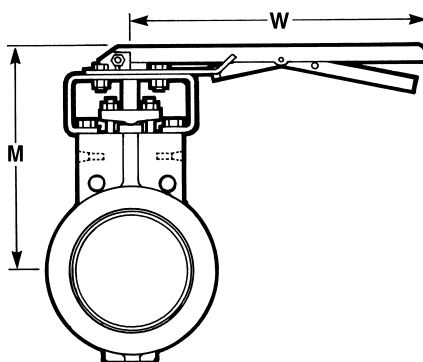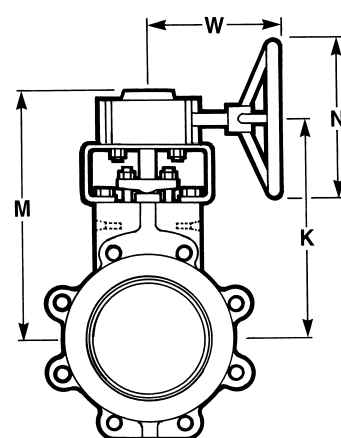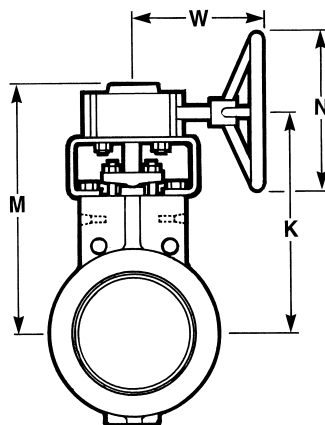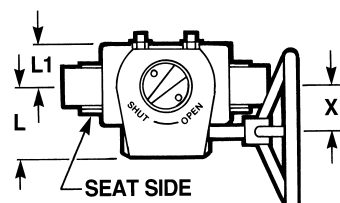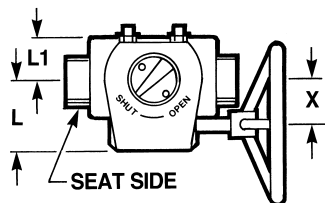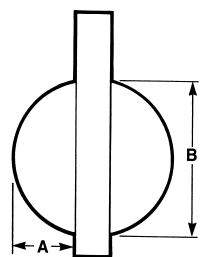







Size in (mm)	Disc Projection		Gear							Gear Type	Lever	
	A in (mm)	B in (mm)	K in (mm)	L in (mm)	L1 in (mm)	M in (mm)	N in (mm)	W in (mm)	X in (mm)		M in (mm)	W in (mm)
2 (50)	$\frac{3}{8}$ (10)	$\frac{1}{4}$ (32)	$\frac{7}{8}$ (200)	$\frac{3}{8}$ (79)	$\frac{1}{2}$ (41)	$\frac{8^{15}}{16}$ (227)	8 (203)	$\frac{5}{4}$ (133)	$\frac{1^{15}}{16}$ (49)	HF-MX30	$\frac{8^{1}}{16}$ (205)	14 (355)
2 (50)	$\frac{3}{8}$ (10)	$\frac{1}{4}$ (32)	$\frac{7}{8}$ (200)	$\frac{3}{8}$ (79)	$\frac{1}{2}$ (41)	$\frac{8^{15}}{16}$ (227)	8 (203)	$\frac{5}{4}$ (133)	$\frac{1^{15}}{16}$ (49)	HF-MX30	$\frac{8^{1}}{16}$ (205)	14 (355)
3 (80)	$\frac{1^{11}}{16}$ (17)	$\frac{2^{7}}{16}$ (62)	$\frac{8^{5}}{8}$ (219)	$\frac{3}{8}$ (79)	$\frac{1}{2}$ (41)	$\frac{9^{11}}{16}$ (246)	8 (203)	$\frac{5}{4}$ (133)	$\frac{1^{15}}{16}$ (49)	HF-MX30	$\frac{8^{13}}{16}$ (224)	14 (355)
3 (80)	$\frac{1^{11}}{16}$ (17)	$\frac{2^{7}}{16}$ (62)	$\frac{8^{5}}{8}$ (219)	$\frac{3}{8}$ (79)	$\frac{1}{2}$ (41)	$\frac{9^{11}}{16}$ (246)	8 (203)	$\frac{5}{4}$ (133)	$\frac{1^{15}}{16}$ (49)	HF-MX30	$\frac{8^{13}}{16}$ (224)	14 (355)
4 (100)	$\frac{1^{11}}{8}$ (29)	$\frac{3^{5}}{8}$ (92)	$\frac{9^{1}}{8}$ (232)	$\frac{3}{8}$ (79)	$\frac{1}{2}$ (41)	$\frac{10^{3}}{16}$ (259)	8 (203)	$\frac{5}{4}$ (133)	$\frac{1^{15}}{16}$ (49)	HF-MX30	$\frac{9^{5}}{16}$ (236)	14 (355)
4 (100)	$\frac{1^{11}}{8}$ (29)	$\frac{3^{5}}{8}$ (92)	$\frac{9^{1}}{8}$ (232)	$\frac{3}{8}$ (79)	$\frac{1}{2}$ (41)	$\frac{10^{3}}{16}$ (259)	8 (203)	$\frac{5}{4}$ (133)	$\frac{1^{15}}{16}$ (49)	HF-MX30	$\frac{9^{5}}{16}$ (236)	14 (355)
5 (125)	$\frac{1^{11}}{2}$ (38)	$\frac{4^{1}}{2}$ (114)	$\frac{10^{3}}{4}$ (273)	$\frac{3^{5}}{8}$ (92)	$\frac{2^{1}}{2}$ (64)	$\frac{12^{1}}{4}$ (311)	8 (203)	$\frac{6^{3}}{4}$ (171)	$\frac{2^{3}}{8}$ (60)	HF-MZ30	$\frac{11^{7}}{16}$ (290)	14 (355)
6 (150)	$\frac{2^{1}}{16}$ (52)	$\frac{5^{9}}{16}$ (141)	$\frac{11^{1}}{4}$ (286)	$\frac{3^{5}}{8}$ (92)	$\frac{2^{1}}{2}$ (64)	$\frac{12^{3}}{4}$ (324)	8 (203)	$\frac{6^{3}}{4}$ (171)	$\frac{2^{3}}{8}$ (60)	HF-MZ30	$\frac{11^{7}}{16}$ (290)	14 (355)
6 (150)	$\frac{2^{1}}{16}$ (52)	$\frac{5^{9}}{16}$ (141)	$\frac{11^{1}}{4}$ (286)	$\frac{3^{5}}{8}$ (92)	$\frac{2^{1}}{2}$ (64)	$\frac{12^{3}}{4}$ (324)	8 (203)	$\frac{6^{3}}{4}$ (171)	$\frac{2^{3}}{8}$ (60)	HF-MZ30	$\frac{11^{7}}{16}$ (290)	14 (355)
8 (200)	$\frac{2^{5}}{8}$ (67)	7 (178)	$\frac{12^{7}}{8}$ (327)	$\frac{4^{3}}{8}$ (111)	$\frac{2^{1}}{2}$ (64)	$\frac{14^{3}}{4}$ (375)	12 (305)	$\frac{8^{1}}{4}$ (210)	$\frac{2^{5}}{8}$ (67)	HF-MV	$\frac{13^{1}}{8}$ (333)	24 (610)
8 (200)	$\frac{2^{5}}{8}$ (67)	7 (178)	$\frac{13^{3}}{8}$ (340)	$\frac{4^{3}}{8}$ (111)	$\frac{2^{1}}{2}$ (64)	$\frac{15^{1}}{4}$ (387)	12 (305)	$\frac{8^{1}}{4}$ (210)	$\frac{2^{5}}{8}$ (67)	HF-MV	Not Available	Not Available
10 (250)	$\frac{3^{5}}{8}$ (92)	$\frac{9^{5}}{16}$ (237)	$\frac{14^{5}}{8}$ (371)	$\frac{4^{3}}{8}$ (111)	$\frac{2^{1}}{2}$ (64)	$\frac{16^{1}}{2}$ (419)	12 (305)	$\frac{8^{1}}{4}$ (210)	$\frac{2^{5}}{8}$ (67)	HF-MV	Not Available	Not Available
10 (250)	$\frac{3^{5}}{8}$ (92)	$\frac{9^{5}}{16}$ (237)	$\frac{15^{1}}{2}$ (394)	$\frac{4^{3}}{8}$ (111)	$\frac{2^{1}}{2}$ (64)	$\frac{17^{3}}{8}$ (441)	12 (305)	$\frac{8^{1}}{4}$ (210)	$\frac{2^{5}}{8}$ (67)	HF-MV	Not Available	Not Available
12 (300)	$\frac{4^{1}}{2}$ (114)	$\frac{11^{3}}{8}$ (289)	$\frac{16^{1}}{16}$ (408)	5 (127)	$\frac{2^{1}}{2}$ (64)	$\frac{18^{1}}{8}$ (460)	12 (305)	$\frac{9^{3}}{4}$ (248)	$\frac{3^{1}}{32}$ (77)	HF-MY40	Not Available	Not Available
12 (300)	$\frac{4^{1}}{2}$ (114)	$\frac{10^{3}}{4}$ (273)	$\frac{16^{7}}{8}$ (429)	5 (127)	$\frac{2^{1}}{2}$ (64)	19 (483)	12 (305)	$\frac{9^{3}}{4}$ (248)	$\frac{3^{1}}{32}$ (77)	HF-MY40	Not Available	Not Available
14 (350)	5 (127)	$\frac{12^{45}}{64}$ (323)	$\frac{17^{5}}{8}$ (448)	$\frac{6^{5}}{8}$ (168)	$\frac{3^{1}}{2}$ (89)	$\frac{19^{3}}{4}$ (502)	18 (457)	$\frac{10^{3}}{16}$ (259)	$\frac{4^{3}}{8}$ (111)	MB-60	Not Available	Not Available
14 (350)	$\frac{4^{1}}{8}$ (105)	$\frac{12^{7}}{32}$ (310)	$\frac{22^{11}}{16}$ (576)	$\frac{6^{5}}{8}$ (168)	$\frac{3^{1}}{8}$ (89)	$\frac{26^{1}}{16}$ (662)	18 (457)	$\frac{13^{15}}{16}$ (354)	$\frac{1^{5}}{16}$ (33)	HSMBF/S3	Not Available	Not Available
16 (400)	$\frac{5^{25}}{32}$ (147)	$\frac{14^{45}}{64}$ (364)	$\frac{19^{13}}{16}$ (503)	$\frac{7^{5}}{8}$ (194)	$\frac{3^{1}}{2}$ (89)	$\frac{22^{1}}{16}$ (560)	18 (457)	$\frac{12^{3}}{16}$ (310)	$\frac{5^{3}}{8}$ (137)	MC-60	Not Available	Not Available
16 (400)	$\frac{4^{51}}{64}$ (122)	$\frac{14^{3}}{32}$ (358)	$\frac{24^{7}}{8}$ (632)	$\frac{7^{5}}{8}$ (194)	$\frac{3^{1}}{2}$ (89)	$\frac{28^{1}}{4}$ (718)	18 (457)	$\frac{15^{9}}{16}$ (395)	$\frac{2^{1}}{16}$ (52)	HFMBS/S3	Not Available	Not Available
18 (450)	$\frac{6^{3}}{8}$ (162)	$\frac{16^{9}}{16}$ (420)	$\frac{21^{15}}{32}$ (545)	$\frac{7^{5}}{8}$ (194)	$\frac{3^{1}}{2}$ (89)	$\frac{23^{3}}{4}$ (603)	18 (457)	$\frac{12^{3}}{16}$ (310)	$\frac{5^{3}}{8}$ (137)	MC-60	Not Available	Not Available
18 (450)	$\frac{5^{11}}{32}$ (136)	$\frac{15^{27}}{32}$ (402)	28 (711)	$\frac{7^{11}}{16}$ (195)	$\frac{4^{3}}{8}$ (111)	$\frac{30^{7}}{16}$ (773)	24 (610)	$\frac{17^{3}}{16}$ (437)	$\frac{5^{27}}{64}$ (138)	MD/55	Not Available	Not Available
20 (500)	$\frac{7^{3}}{32}$ (180)	$\frac{18^{15}}{32}$ (469)	$\frac{22^{7}}{8}$ (581)	$\frac{7^{5}}{8}$ (194)	$\frac{3^{1}}{2}$ (89)	$\frac{25^{9}}{64}$ (649)	18 (457)	$\frac{12^{3}}{16}$ (310)	$\frac{5^{3}}{8}$ (137)	MC-60	Not Available	Not Available
20 (500)	$\frac{6^{1}}{4}$ (159)	$\frac{17^{1}}{4}$ (438)	$\frac{24^{5}}{8}$ (626)	$\frac{9^{1}}{8}$ (232)	$\frac{4^{3}}{8}$ (111)	$\frac{28^{1}}{8}$ (714)	18 (457)	$\frac{15^{3}}{4}$ (400)	$\frac{2^{3}}{8}$ (60)	MDF/S3	Not Available	Not Available
24 (600)	$\frac{8^{5}}{16}$ (211)	$\frac{22^{3}}{32}$ (561)	$\frac{26^{1}}{16}$ (662)	$\frac{9^{1}}{8}$ (232)	$\frac{4^{3}}{8}$ (111)	$\frac{29^{7}}{16}$ (748)	18 (457)	$\frac{15^{3}}{4}$ (400)	$\frac{2^{3}}{8}$ (60)	MDF/S3	Not Available	Not Available
30 (750)	11 (279)	$\frac{28^{3}}{8}$ (721)	$\frac{31^{1}}{4}$ (794)	$\frac{9^{7}}{16}$ (240)	$\frac{4^{3}}{4}$ (121)	$\frac{34^{5}}{8}$ (879)	18 (457)	$\frac{16^{15}}{32}$ (418)	$\frac{2^{11}}{16}$ (68)	MGF/S3	Not Available	Not Available
36 (900)	$\frac{13^{41}}{64}$ (346)	$\frac{34^{3}}{8}$ (873)	$\frac{40^{1}}{4}$ (1022)	$\frac{9^{7}}{16}$ (240)	$\frac{4^{3}}{4}$ (121)	$\frac{43^{5}}{8}$ (1108)	24 (610)	$\frac{17^{23}}{32}$ (450)	$\frac{2^{11}}{16}$ (68)	HFMGF/S5 FOR 195 PSIG ΔP	Not Available	Not Available
36 (900)	$\frac{13^{41}}{64}$ (346)	$\frac{34^{3}}{8}$ (873)	$\frac{40^{1}}{4}$ (1022)	$\frac{9^{11}}{16}$ (240)	$\frac{4^{3}}{4}$ (121)	$\frac{47^{3}}{4}$ (1108)	24 (610)	$\frac{20^{11}}{32}$ (450)	6 (68)	HFMGF/S5 FOR 285 PSIG ΔP	Not Available	Not Available

ASME Class 150 ASME Class 300

All dimensions are approximate and for illustration purposes only. For exact dimensions request certified dimensional prints.

BX2001

Dimensions for Wafer and Lug Valves

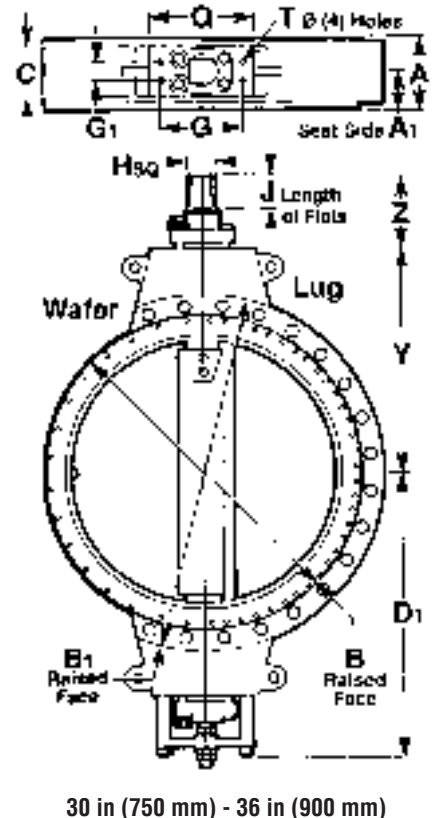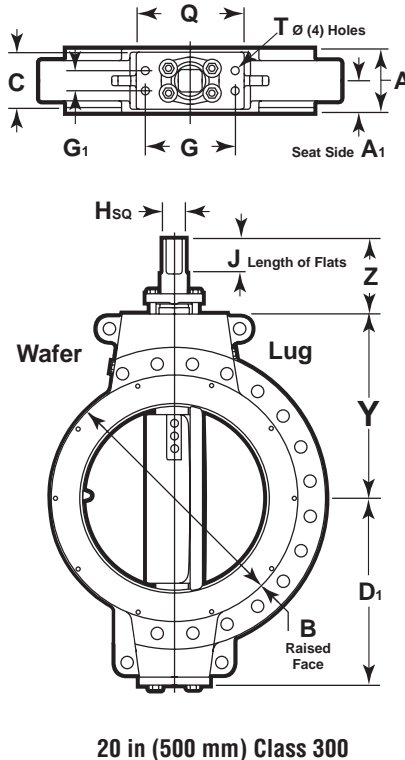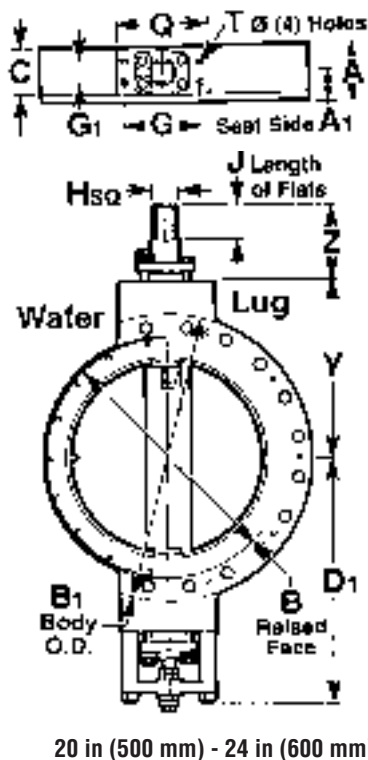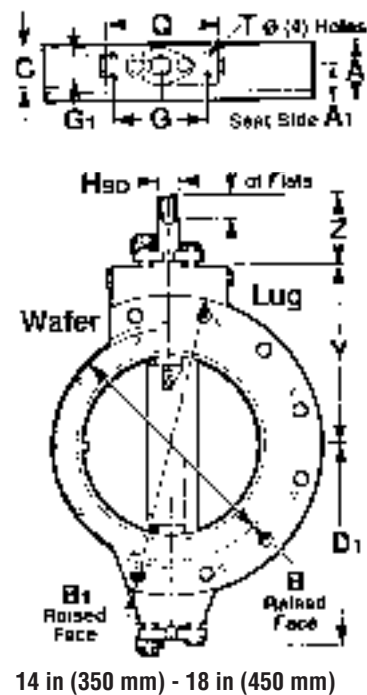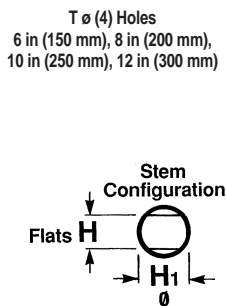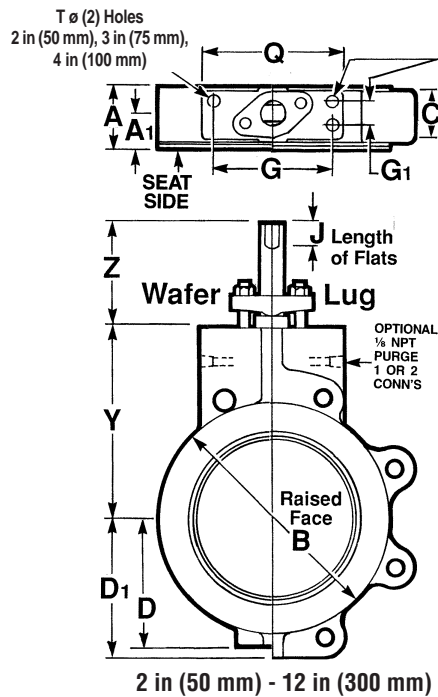

Dimensions Common to BX2 Wafer and Lug Valves																	
Size in (mm)	A in (mm)	A1 in (mm)	B in (mm)	C in (mm)	D in (mm)	D1 in (mm)	G in (mm)	G1 in (mm)	H in (mm)	H1 in (mm)	J in (mm)	Q in (mm)	T in (mm)	Y in (mm)	Z in (mm)	Shaft in Ø (mm)	
2 (50)	1¾ (44)	1¹⁄₁₆ (27)	3⁷⁄₈ (98)	1³⁄₈ (35)	2¹⁄₂ (64)	2¹⁄₂ (64)	3⁵⁄₈ (920)	⁵⁄₈ (16)	440 438 (11.17 11.13)	589 584 (14.96 14.83)	1¹⁄₁₆ (17)	4¹⁄₂ (114)	1⁄₂-13 ⁵⁄₈ DP	4¾ (121)	2¹¹⁄₁₆ (68)	⁵⁄₈ (16)	
2 (50)	1¾ (44)	1¹⁄₁₆ (27)	3⁷⁄₈ (98)	1³⁄₈ (35)	2²¹⁄₃₂ (67)	2¹⁵⁄₁₆ (75)	3⁵⁄₈ (920)	⁵⁄₈ (16)	440 438 (11.17 11.13)	589 584 (14.96 14.83)	1¹⁄₁₆ (17)	4¹⁄₂ (114)	1⁄₂-13 ⁵⁄₈ DP	4¾ (121)	2¹¹⁄₁₆ (68)	⁵⁄₈ (16)	
3 (80)	1⁷⁄₈ (48)	1¹⁄₈ (29)	5 (127)	1⁷⁄₁₆ (36)	3¹⁄₈ (79)	3¹⁄₈ (79)	3⁵⁄₈ (92)	⁵⁄₈ (16)	440 438 (11.17 11.13)	589 584 (14.96 14.83)	1¹⁄₁₆ (17)	4¹⁄₂ (114)	1⁄₂-13 ⁵⁄₈ DP	5¹⁄₂ (140)	2¹¹⁄₁₆ (68)	⁵⁄₈ (16)	
3 (80)	1¹⁵⁄₁₆ (49)	1¹⁄₈ (29)	5 (127)	2³⁄₄ (70)	3³⁄₈ (86)	3¹³⁄₁₆ (97)	3⁵⁄₈ (92)	⁵⁄₁₆ (8)	440 438 (11.18 11.13)	589 584 (14.96 14.83)	1³⁄₁₆ (21)	4¹⁄₂ (114)	1⁄₂-13 ⁵⁄₈ DP	5¹⁄₂ (140)	2¹¹⁄₁₆ (68)	⁵⁄₈ (16)	
4 (100)	2¹⁄₈ (54)	1¼ (32)	6³⁄₁₆ (157)	1½ (38)	3⁵⁄₈ (92)	4⁷⁄₃₂ (107)	3⁵⁄₈ (92)	⁵⁄₈ (16)	440 438 (11.17 11.13)	589 584 (14.96 14.83)	1¹⁄₁₆ (17)	4¹⁄₂ (114)	1⁄₂-13 ⁵⁄₈ DP	6 (152)	2¹¹⁄₁₆ (68)	⁵⁄₈ (16)	
4 (100)	2³⁄₁₆ (57)	1¼ (32)	6³⁄₁₆ (157)	2³⁄₄ (70)	3⁷⁄₈ (86)	4²⁵⁄₆₄ (112)	3⁵⁄₈ (92)	⁵⁄₁₆ (8)	440 438 (11.17 11.13)	589 584 (14.96 14.83)	1³⁄₁₆ (21)	4¹⁄₂ (114)	1⁄₂-13 ⁵⁄₈ DP	6 (152)	2¹¹⁄₁₆ (68)	⁵⁄₈ (16)	
5 (125)	2¼ (57)	1⁵⁄₁₆ (33)	7⁵⁄₁₆ (186)	2¹⁵⁄₁₆ (75)	4³⁄₁₆ (106)	4³⁄₁₆ (106)	4¼ (108)	1¹⁄₈ (29)	623 621 (15.82 15.77)	812 807 (20.62 20.50)	1¹⁄₁₆ (17)	5¼ (133)	1⁄₂-13 ⁵⁄₈ DP	6¹⁄₂ (165)	3¹³⁄₁₆ (97)	⁷⁄₈ (22)	
6 (150)	2¼ (57)	1⁵⁄₁₆ (33)	8¹⁄₂ (216)	1⁷⁄₈ (47)	4¹¹⁄₁₆ (119)	5⁵⁄₃₂ (131)	4¼ (108)	1¹⁄₈ (29)	623 621 (15.82 15.77)	812 807 (20.62 20.50)	1¹⁄₁₆ (17)	5¼ (133)	1⁄₂-13 ⁵⁄₈ DP	7 (178)	3¹³⁄₁₆ (97)	⁷⁄₈ (22)	
6 (150)	2³⁄₈ (60)	1⁵⁄₁₆ (33)	8¹⁄₂ (216)	2¹⁵⁄₁₆ (75)	5³⁄₈ (137)	5⁷⁄₈ (149)	4¼ (108)	⁹⁄₁₆ (14)	623 621 (15.82 15.77)	812 807 (20.62 20.50)	1³⁄₁₆ (21)	5¼ (133)	1⁄₂-13 ⁵⁄₈ DP	7 (178)	3¹³⁄₁₆ (97)	⁷⁄₈ (22)	
8 (200)	2⁷⁄₁₆ (62)	1³⁄₈ (35)	10⁵⁄₈ (270)	2 (51)	6 (152)	6⁵⁄₁₆ (160)	4¼ (108)	1¹⁄₈ (29)	748 746 (19.00 18.95)	1057 1052 (26.85 26.72)	1¹⁄₈ (29)	6 (152)	1⁄₂-13 ⁵⁄₈ DP	8¼ (210)	4¼ (108)	1³⁄₃₂ (28)	
8 (200)	2²⁹⁄₃₂ (74)	1³⁄₈ (35)	10⁵⁄₈ (270)	3¹⁄₁₆ (78)	6⁴⁹⁄₆₄ (172)	7⁵⁄₃₂ (182)	4¼ (108)	⁹⁄₁₆ (14)	748 746 (19.00 18.95)	1057 1052 (26.85 26.72)	1¹⁄₈ (29)	6 (152)	1⁄₂-13 ⁵⁄₈ DP	8¾ (222)	4½ (108)	1³⁄₃₂ (28)	
10 (250)	2¹⁵⁄₁₆ (75)	1¹¹⁄₁₆ (43)	12¾ (324)	2³⁄₈ (60)	7¾ (197)	7¾ (197)	5¼ (133)	1¼ (32)	873 871 (22.17 22.12)	1339 1334 (34.01 33.88)	1¹⁄₈ (29)	6½ (165)	⁵⁄₈-11 ¾ DP	10 (254)	4¼ (108)	1³⁄₈ (35)	
10 (250)	3¹¹⁄₃₂ (85)	1¾ (45)	12¾ (324)	3²⁹⁄₃₂ (99)	8½ (216)	8½ (216)	5¼ (133)	⁵⁄₈ (16)	873 871 (22.17 22.12)	1339 1334 (34.01 33.88)	1¹⁄₈ (29)	6½ (165)	⁵⁄₈-11 ¾ DP	10⁷⁄₈ (276)	4¼ (108)	1½ (38)	
12 (300)	3⁵⁄₁₆ (84)	1¹⁵⁄₁₆ (49)	15 (381)	2³⁄₈ (60)	9 (229)	9¼ (235)	5¼ (133)	1¼ (32)	997 995 (25.32 25.27)	1500 1495 (38.10 37.97)	1½ (38)	7 (178)	⁵⁄₈-11 ¾ DP	11½ (292)	4¾ (121)	1⁵⁄₈ (41)	
12 (300)	3¹¹⁄₁₆ (94)	2¹⁄₆₄ (51)	15 (381)	4½ (114)	10 (254)	10 (254)	6 (152)	¾ (19)	997 995 (25.32 25.27)	1500 1495 (38.10 37.97)	1½ (38)	7½ (191)	⁵⁄₈-11 ¾ DP	12¼ (311)	4¾ (121)	1¾ (45)	
14 (350)	3¾ (95)	2⁹⁄₃₂ (58)	16¼ (413)	2¾ (70)		14 (356)	6⁵⁄₈ (168)	1½ (38)	1124 1122 (28.549 28.498)	1500 1495 (38.10 37.97)	1½ (38)	8 (203)	1⁄₂-13 ¾ DP	12½ (317)	4⁷⁄₈ (124)	1¾ (44)	
14 (350)	4¾ (121)	2²³⁄₆₄ (60)	17⁵⁄₈ (448)	4³⁄₈ (111)		19¹⁄₈ (486)	7 (178)	2½ (64)	1421 1416 (36.093 35.966)	1997 1995 (49.606 49.571)	1¾ (44)	8½ (216)	⁵⁄₈-11 1¹⁄₈ DP	15³⁄₈ (391)	7½ (191)	2¹⁄₈ (54)	
16 (400)	4¹⁄₈ (105)	2¹³⁄₃₂ (61)	18½ (470)	3³⁄₁₆ (81)		15⁷⁄₈ (403)	7 (178)	1½ (38)	1248 1246 (31.699 31.648)	1500 1495 (38.10 37.97)	2¹⁄₈ (54)	9 (228)	1⁄₂-13 ¾ DP	14³⁄₁₆ (360)	6 (152)	2 (51)	
16 (400)	5³⁄₈ (137)	2²¹⁄₃₂ (67)	19⁷⁄₈ (505)	5 (127)		20¾ (527)	7 (178)	2½ (64)	1686 1684 (42.824 42.774)	2250 2248 (57.150 57.099)	2⁵⁄₁₆ (59)	8¾ (222)	⁵⁄₈-11 1¹⁄₈ DP	17³⁄₈ (441)	8³⁄₈ (213)	2½ (64)	
18 (450)	4⁵⁄₈ (118)	2¹⁷⁄₃₂ (64)	21 (533)	3¹⁄₁₆ (78)		17⁷⁄₈ (454)	7 (178)	1½ (38)	1248 1246 (31.699 31.648)	1500 1495 (38.10 37.97)	2³⁄₈ (60)	9 (228)	1⁄₂-13 ¾ DP	15¹⁵⁄₁₆ (404)	6¹⁄₈ (155)	2¼ (57)	
18 (450)	6 (152)	3 (76)	22³⁄₈ (568)	5⁵⁄₈ (143)		23¹⁹⁄₃₂ (599)	7 (178)	2½ (64)	1874 1872 (47.599 47.548)	2548 2546 (64.249 64.198)	2⁷⁄₈ (73)	8⁵⁄₈ (219)	⁵⁄₈-11 1¹⁄₈ DP	20 (508)	8⁵⁄₈ (219)	2¾ (70)	
20 (500)	5¹⁄₈ (130)	2²⁵⁄₃₂ (71)	23 (584)	4³⁄₈ (111)		24⁵⁄₁₆ (617)	7½ (191)	2 (51)	1874 1872 (47.599 47.548)	2548 2546 (64.249 64.198)	2¾ (70)	9 (228)	¾-10 1 DP	16¾ (425)	7¹⁄₈ (181)	2½ (64)	
20 (500)	6³⁄₈ (101)	3⁷⁄₃₂ (82)	27 (686)	6⁵⁄₈ (168)		19 (483)	8¹³⁄₁₆ (224)	2 (51)	2250 2248 (57.150 57.099)	2906 2904 (73.812 73.762)	3¹⁄₈ (78)	10⁷⁄₈ (276)	¾-10 1 DP	18³⁄₈ (467)	7⁷⁄₁₆ (189)	3 (76)	
24 (600)	6³⁄₁₆ (157)	3⁵⁄₃₂ (80)	27¼ (692)	5¹⁄₈ (130)		27½ (698)	8¹³⁄₁₆ (224)	2 (51)	2250 2248 (57.150 57.099)	2906 2904 (73.812 73.762)	3¹⁄₈ (79)	10⁷⁄₈ (276)	¾-10 1 DP	19¾ (501)	7⁷⁄₁₆ (189)	3 (76)	
30 (750)	7½ (191)	4 (102)	33¾ (857)	5½ (139)		32¼ (819)	8¹³⁄₁₆ (224)	2 (51)	2624 2622 (66.649 66.598)	3548 3546 (88.649 88.598)	3 (76)	11¼ (285)	¾-10 1 DP	24¼ (616)	7¾ (197)	3½ (89)	
36 (900)	8¹⁄₁₆ (205)	4⁷⁄₃₂ (107)	40¼ (1022)	6¼ (158)		41½ (1054)	9½ (241)	4 (102)	2906 2904 (73.812 73.762)	3912 3908 (99.249 99.198)	5 (127)	11½ (292)	¾-10 1 DP	30¼ (768)	12¼ (311)	4 (102)	

ASME Class 150 ASME Class 300

All dimensions are approximate and for illustration purposes only. For exact dimensions request certified dimensional prints.

BX2001

Flange Drilling Specifications

Fastener Thread Sizes

Due to the hydrodynamic torque encountered with butterfly valves, safe operating practices dictate that manual gear operators, pneumatic actuators or electric actuators be used when these differential pressures are exceeded.

Wafer Style – Class 150 and 300 Drilling				Lug Style – Class 150 and 300 Drilling			
Size in (mm)	No. of Holes	Hole Size Inch	B.C. in (mm)	No. of Fasteners	Thread Size Inch	B.C. in (mm)	B1 in (mm)
2 (50)	4	3/4	4 3/4 (121)	4	5/8-11	4 3/4 (121)	6 (152)
2 (50)	2	3/4	5 (127)	8	5/8-11	5 (127)	6 1/4 (154)
3 (80)	2	3/4	6 (152)	4	5/8-11	6 (152)	7 1/2 (191)
3 (80)	2	7/8	6 5/8 (168)	8	3/4-10	6 5/8 (168)	8 1/8 (206)
4 (100)	2	3/4	7 1/2 (191)	8	5/8-11	7 1/2 (191)	9 (229)
4 (100)	2	7/8	7 7/8 (200)	8	3/4-10	7 7/8 (200)	9 3/8 (238)
6 (150)	2	7/8	9 1/2 (241)	8	3/4-10	9 1/2 (241)	11 (279)
6 (150)	2	7/8	10 5/8 (270)	12	3/4-10	10 5/8 (270)	12 1/8 (308)
8 (200)	2	7/8	11 3/4 (298)	8	3/4-10	11 3/4 (298)	13 1/2 (343)
8 (200)	2	1	13 (330)	12	7/8-9	13 (330)	14 3/4 (315)
10 (250)	2	1	14 1/4 (362)	12	7/8-9	14 1/4 (362)	16 (406)
10 (250)	4***	1-8	15 1/4 (387)	16	1-8	15 1/4 (387)	17 1/4 (438)
12 (300)	2	1	17 (432)	12	7/8-9	17 (432)	19 (483)
12 (300)	4***	1 1/8-8	17 3/4 (451)	16	1 1/8-8	17 3/4 (451)	20 1/4 (514)
14 (350)	4	1 1/16	18 3/4 (476)	12	1-8	18 3/4 (476)	21 (533)
14 (350)	8*	1 1/8-8	20 1/4 (514)	20*	1 1/8-8	20 1/4 (514)	23 (584)
16 (400)	4	1 1/16	21 1/4 (540)	16	1-8	21 1/4 (540)	23 1/2 (597)
16 (400)	8*	1 1/4-8	22 1/2 (572)	20*	1 1/4-8	22 1/2 (572)	25 1/2 (648)
18 (450)	4	1 3/16	22 3/4 (578)	16	1 1/8-8	22 3/4 (578)	25 (635)
18 (450)	8*	1 1/4-8	24 3/4 (628)	24*	1 1/4-8	24 3/4 (628)	28 (711)
20 (500)	8*	1 1/8-8	25 (635)	20*	1 1/8-8	25 (635)	27 1/2 (699)
20 (500)	10*	1 1/4-8	27 (686)	24*	1 1/4-8	27 (686)	30 (762)
24 (600)	8*	1 1/4-8	29 1/2 (749)	20*	1 1/4-8	29 1/2 (749)	32 (813)
30 (750)	16*	1 1/4-8	36 (914)	28**	1 1/4-8	36 (914)	38 3/4 (984)
36 (900)	16**	1 1/2-8	42 3/4 (1086)	32**	1 1/2-8	42 3/4 (1086)	46 (1168)

ASME Class 150 ASME Class 300

All dimensions are approximate and for illustration purposes only. For exact dimensions request certified dimensional prints.

* The two fastener holes on either side of the shaft, top and bottom, are tapped blind holes (both sides).

** Four fastener holes, two on either side of the shaft top and bottom, are tapped blind holes, both sides.

*** The two fastener holes on either side of the shaft, top and bottom, are tapped through.

Maximum Differential Pressures	
Valve Size in (mm)	Max ΔP – Valve 90° open†
3 (80)	34 PSIG (2.3 bar)
4 (100)	16 PSIG (1.1 bar)
6 (150)	7 PSIG (.5 bar)
8 (200)	5 PSIG (.3 bar)

†Based on a 120 pound maximum force on wrench. See MSS SP91 for further clarification.

Big Max high performance butterfly valves meet the following flange specifications:

ASME B16.5	2 in (50 mm) - 24 in (600)
MSS SP44	30 in (750 mm) & 36 in (900 mm)
ASME B16.47 (Series A)	30 in (750 mm) & 36 in (900 mm)

BX2001

Flange Specifications and Operator Weights

BX Manual Operator Weights		
Valve Size in (mm)	Locking Lever	Gear
2 (50)	6 lbs (2.7 kg)	11 lbs (5 kg)
2 (50)	6 lbs (2.7 kg)	11 lbs (5 kg)
3 (80)	6 lbs (2.7 kg)	11 lbs (5 kg)
3 (80)	6 lbs (2.7 kg)	11 lbs (5 kg)
4 (100)	6 lbs (2.7 kg)	11 lbs (5 kg)
4 (100)	6 lbs (2.7 kg)	11 lbs (5 kg)
6 (150)	6 lbs (2.7 kg)	11 lbs (5 kg)
6 (150)	6 lbs (2.7 kg)	11 lbs (5 kg)
8 (200)	20 lbs (9.1 kg)	28 lbs (12.7 kg)
8 (200)	20 lbs (9.1 kg)	28 lbs (12.7 kg)
10 (250)	N/A	28 lbs (12.7 kg)
10 (250)	N/A	28 lbs (12.7 kg)
12 (300)	N/A	31 lbs (14 kg)
12 (300)	N/A	31 lbs (14 kg)
14 (350)	N/A	64 lbs (29.0 kg)
14 (350)	N/A	94 lbs (42.6 kg)
16 (400)	N/A	76 lbs (34.5 kg)
16 (400)	N/A	108 lbs (49.0 kg)
18 (450)	N/A	76 lbs (34.5 kg)
18 (450)	N/A	125 lbs (56.7 kg)
20 (500)	N/A	76 lbs (34.5 kg)
20 (500)	N/A	101 lbs (45.8 kg)
24 (600)	N/A	101 lbs (45.8 kg)
30 (750)	N/A	156 lbs (70.8 kg)
36 (900)	N/A	HFM GF/S5 156 lbs (70.8 kg) HFM GF/D9 224 lbs (101.6 kg)

ASME Class 150 ASME Class 300

All dimensions are approximate and for illustration purposes only. For exact dimensions request certified dimensional prints.

BX Valve Weights* In Pounds (Kilograms)		
Valve Size in (mm)	BX2W	BX2L
2 (50)	12 lbs (5.4 kg)	12 lbs (5.4 kg)
2 (50)	10 lbs (4.5 kg)	14 lbs (6.4 kg)
3 (80)	16 lbs (7.3 kg)	18 lbs (8.2 kg)
3 (80)	15 lbs (6.8 kg)	21 lbs (9.5 kg)
4 (100)	20 lbs (9.1 kg)	26 lbs (11.8 kg)
4 (100)	20 lbs (9.1 kg)	27 lbs (12.2 kg)
5 (125)	30 lbs (13.5 kg)	35 lbs (15.8 kg)
6 (150)	35 lbs (15.9 kg)	40 lbs (18.1 kg)
6 (150)	36 lbs (16.3 kg)	52 lbs (23.6 kg)
8 (200)	58 lbs (26.3 kg)	68 lbs (30.8 kg)
8 (200)	63 lbs (28.6 kg)	90 lbs (40.8 kg)
10 (250)	86 lbs (39 kg)	104 lbs (47.1 kg)
10 (250)	106 lbs (48 kg)	146 lbs (66 kg)
12 (300)	125 lbs (56.7 kg)	160 lbs (72.6 kg)
12 (300)	161 lbs (73 kg)	230 lbs (104 kg)
14 (350)	250 lbs (113.4 kg)	300 lbs (136 kg)
14 (350)	345 lbs (157 kg)	636 lbs (289 kg)
16 (400)	325 lbs (147.4 kg)	400 lbs (181.4 kg)
16 (400)	480 lbs (218 kg)	900 lbs (408 kg)
18 (450)	400 lbs (181.4 kg)	500 lbs (226.8 kg)
18 (450)	685 lbs (311 kg)	1170 lbs (530.7 kg)
20 (500)	467 lbs (211.8 kg)	624 lbs (283 kg)
20 (500)	575 lbs (261 kg)	790 lbs (358 kg)
24 (600)	665 lbs (301.6 kg)	880 lbs (399 kg)
30 (750)	1050 lbs (476.3 kg)	1425 lbs (646.4 kg)
36 (900)	2162 lbs (980.7 kg)	2748 lbs (1246.5 kg)

Automax® Actuators, Controls and Accessories

For precise throttling control or simple on-off operation of Big Max valves the best choice is Automax actuators, controls and accessories.



BX2001 wafer style valve with Automax Super Nova rack and pinion actuator and Apex 5000 modular positioning system

BX2001 lug style valve with Automax Super Nova rack and pinion actuator and UltraSwitch

SuperNova™ Pneumatic Rack & Pinion Actuators

Material choices include hard anodized aluminum, epoxy filled composite and stainless steel. Available in torque ranges from 25 in-lb (3 Nm) to 58,000 in-lb (6554 Nm).

Heavy-Duty Rotary Actuators

Scotch-Yoke type provide torques from 3,000 in-lb (339 Nm) to 500,000 in-lb (56,500 Nm). Designed for maximum performance and cycle life.

Centura® Electric Rotary Actuators

Precise on-off and modulating control, they are available in metallic and non-metallic housings with torque ranges from 225 in-lbs (25 Nm) to 3,500 in-lbs (396 Nm). Hazardous and non-hazardous applications.



XL90™ High Performance Positioner

Analog positioner with two-stage relay for fast, sensitive response characteristics. Pneumatic or electrical control signals. Optional position feedback limit switches, 4-20mA position feedback transmitter, and UltraDome visual position indicator.



Logix™ Digital Positioner

Combines fast 16-bit microprocessor and two-stage electronic relay with HART™ protocol for compatibility with smart instrument systems. Quick-Cal™ function for automatic, push-button calibration. Proprietary software for positioner communication via computer provides a variety of configurations, diagnostics, custom characterizations and other functions.

Accessories

- Auto Brakits™ mounting kits
- Flow controls, NAMUR accessories, lockouts, gear overrides
- SureGrip™ valve couplings

UltraSwitch® GL / XL / PL Series Rotary Position Indicators

Compact and economical packages for both visual and remote electrical indication of valve position. Die cast aluminum or non-metallic versions with UL and CSA ratings. Housings suitable for NEMA 4, 4X, 7 & 9 applications.



Aviator™ Rotary Position Indicator

Internal pilot solenoid coil provides a truly integrated package for both visual and electrical position indication as well as air supply control.

APEX™ Modular Positioner

Precise valve positioning with advanced features. Die cast aluminum and non-metallic versions. Modular manifold base for pneumatic or electrical control signals. UL, C-UL, CENELEC & SAA.



BUSwitch™ Valve Control and Monitoring System

Digital rotary position indicator. Control and monitoring of automated on-off quarter-turn valves. FOUNDATION® Fieldbus and Profibus-DP protocols.



Actuation	20, 21
Blow-out proof stem	2
Contacts	Back Cover
Control Valves	20, 21
Design Changes	22
Differential Pressure - maximum	18
Dimensions - valves with actuators	14, 15
Dimensions - wafer and lug valves	16, 17
Double offset disc	3
Durco valves	Back Cover
Features and benefits	2, 3
Flange specifications - wafer and lug	18, 19
Gibb pin	3
How to specify valves	23
Installation	22
Lantern ring	6
Maintenance	22
Materials selection chart	22
Operation	22
Packing options	6
Parts list - all 14-36 in valves	12, 13
Parts list - Apex 2-12 in valves	11
Parts list - end of line lug valve 2-12 in	9
Parts list - fire sealed valve 2-12 in	8
Parts list - standard valves 2-12 in	9
Parts list - TriFlex 2-12 in valves	10
Pressure/temperature curves	8
Purge ports	6
Seat - Apex metal	4, 7
Seat - Fire Sealed	7
Seat - Metal	4, 5, 7
Seat - to 1000°F (538°C)	5, 7
Seat - to 600°F (315°C)	4, 7
Seat - TriFlex metal	5, 7
Seat - UHMWPE	7
Selection, valves	22
Standards for BX2001	8
Stem seal - Apex valves	6
Stem seal - fire sealed valves	6
Stem seal - live loaded valves	6
Stem seal - soft seated valves	6
Stem seal - TriFlex valves	6
Stem seal - with lantern ring	6
Stem seal - with purge port	6
Vacuum service	8
Valve cutaway	2, 3
Weights - operator	19
Weights - valve	19

Selection, Installation, Operation and Maintenance

Although Flowserve can, and often does, provide general guidelines, it is obviously not possible to provide application specific data and warnings for all conceivable applications. The purchaser/end user must therefore assume the ultimate responsibility for the proper selection, installation, operation and maintenance of the products. Read the appropriate IOM available from Cookeville, TN 38501 before installing, operating or repairing any valve. The purchasers/end user should train its employees and/or contractors in the safe use of the Flowserve products in connection with the purchaser's manufacturing processes.

Design Changes

In order to follow Flowserve's commitment to continuous improvement, we reserve the right to change product and performance specifications without notice.



BX2001 lug style valve with Automax SuperNova[®] rack and pinion actuator and Logix[®] digital positioner.

Materials Selection Chart

DS = ASTM A216 Gr. WCB (CAST STEEL)
D2 = ASTM A351 Gr. CF8 (304 S.S.)
D4 = ASTM A351 Gr. CF8M (316 S.S.)
D4L = ASTM A351 Gr. CF3M (316L S.S.)
D20 = ASTM A351 Gr. CN-7M (DURIMET 20)
CK3M = ASTM A351 Gr. CK-3MCuN (254 SMO)*
DINC = ASTM A494 Gr. CY-40 (INCONEL 600)**
DMM = ASTM A494 Gr. M35-1 (MONEL 400)**
DNI = ASTM A494 Gr. CZ-100 (NICKEL 200)
DC2 = ASTM A494 Gr. N-7M (CHLORIMET 2)
DC3 = ASTM A494 Gr. CW-6M (CHLORIMET 3)
Ti = ASTM B367 Gr. C-3 (TITANIUM)
CD = ASTM A351 Gr. CD4MCu (Durcomet100)

* Registered trademark of Avesta AB

**Registered trademark of International Nickel Co. Inc.

How To Specify BX2001 Valves

Valve Size				Size	Type	Body Class	Materials	Seal	Seat	Operator	Options
Selection	Code	Selection	Code								
2 in (50mm)	2	14 in (350mm)	14								
3 in (80mm)	3	16 in (400mm)	16								
4 in (100mm)	4	18 in (450mm)	18								
5 in (125mm)	5	20 in (500mm)	20								
6 in (150mm)	6	24 in (600mm)	24								
8 in (200 mm)	8	30 in (750mm)	30								
10 in (250mm)	10	36 in (900mm)	36								
12 in (300mm)	12										
Type											
Selection	Code	Selection	Code								
Big Max 2001	BX2										
Body											
Lug	L										
Water	W										
Class											
ASME 150 Bidirectional	1										
DIN PN10	2										
ASME 150 End of Line Lug	4										
DIN PN16	5										
DIN PN20	7										
ASME 300 Bidirectional	3										
ASME 300 End of Line Lug	9										
DIN PN25	0										
DIN PN40	8										
Body Material											
Selection	Code	Selection	Code								
D4*■	1	DC3	6								
DS*■	8	Ti	7								
D4L	L	D2	9								
D20	2	DINC	N								
DMM	3	CK3M	K								
DNI	4	CD4MCu	0								
DC2	5										
Disc Material											
Selection	Code	Selection	Code								
D4*■	1	DC3	6								
D4L	L	Ti	7								
D20	2	D2	9								
DMM	3	DINC	N								
DNI	4	CK3M	K								
DC2	5	CD4MCu	0								
Shaft Material											
Selection	Code	Selection	Code								
17-4SS*	1	Ti	7								
316SS	S	N50A	R								
C20H	2	▲ N50 TriFlex +601°F	T								
K Monel 500	3	Ferralium 255	F								
Nickel	4	254 SMO	K								
Hastelloy B	5										
Hastelloy C276	6										
Bearing Material											
Selection	Code	Selection	Code								
PTFE/Fiberglass	A	Inconel/PTFE	N								
Hastelloy B/PTFE	B	316SS/PTFE ■	S								
C20/PTFE	C	Monel/PTFE	M								
Hastelloy C/PTFE	H	Nickel/PTFE	4								
Inconel X750, APEX or TriFlex +400°F	I	316 HCP (TriFlex* or APEX +400°F)	T								
Titanium/PTFE	L										

Code	Selection
T	TriFlex/Apex to 400°F
H	TriFlex/Apex 401°F to 600°F
R	TriFlex 601°F to 800°F
Y	TriFlex 801°F to 1000°F
B	Single 1/8" NPT Bleed/Inj. Port ¹
P	Two 1/8" NPT Purge Ports ¹
L	Bearing Lube (1/8" NPT Port)
C	CL2 Cleaned
O	O2 Cleaned★
S	Special Cleaning★
N	N.A.C.E. Trim (includes R shaft)
J	Steam Jacket
D	Steam Traced Disc
F	Special Fasteners
I	Inconel 718 Bellevilles ●▼
Z	None
X	Special Non-Standard

Code	Selection
0	Locking Lever 2-8 in
1	Enclosed Gear
2	Pad Lockable Gear
9	Bare Stem

Code	Selection
V	PFA/Viton Energizer*
R	PFA/Silicone Energizer
M	PFA/Inconel Energizer
Z	Fire Seal PFA/Inconel
N	Inconel TriFlex ◆
S	316/Inconel TriFlex
A	Inconel APEX Class IV
C	Copper/Inconel TriFlex
K	Monel TriFlex
U	UHMWPE (2" - 12")
4	Nickel/Inconel TriFlex

Code	Selection
1	Single PTFE Cup & Cone*
2	Double PTFE Cup & Cone
3	Live Loaded Single Cup & Cone*
4	Live Loaded Double Cup & Cone**
7	Triple Seal Single PTFE
	Cup & Cone (Self-Adjusting)
8	Triple Seal Double PTFE
	Cup & Cone (Self-Adjusting)
9	Single Grafoil ■▼
0	Double Grafoil ▼

* = Standard PFA Seat - All other materials considered optional.

** = 17-7 S.S. Belleville Washers included.

★ = Customer specification must be given.

● = For use with Shaft Seals 3 & 4 only (17-7 Bellevilles Standard).

■ = Standard Fire Sealed.

◆ = Standard TriFlex Seat - All other materials considered optional.

▼ = Grafoil Packing is NOT recommended with Belleville Washers.

▲ = ASTM A479 Xn19 Standard TriFlex +601°F (315°C)

¹ = Per Packing Gland



Flowserve has the answer to your corrosion resistant, quarter-turn valving needs.

Clockwise from top right.

Durco® BTV-2000

PTFE or UHMWPE lined
chemical service valve

Atomac®

Lined ball valves

- ANSI/ISO, standard and full port
- Specialty valves
- Valve products and accessories

Durco® SleeveLine®

Non-lubricated, PTFE-sleeved
plug valves

- G4 Isolation
- G4E – DIN Mounting Pad
- G4 Marathon™
- TSG4 Severe Service

Durco® T-Line®

Non-lubricated, PTFE-lined
plug valves

Big Max® Butterfly

High performance valves

Durco® Microfinish™

Alloy ball valves

Automax®

Valve automation
systems

- Actuators
- Controls with
smart technology
- Accessories

For more information, contact:



Flowserve Corporation
Flow Control Division
1978 Foreman Drive
Cookeville, Tennessee 38501
Phone: 931 432 4021
Fax: 931 432 3105
www.flowserve.com



Or Consult Your Local Stocking Distributor

Flowserve Ahaus GmbH
Von Braun Straße 19a
D-48683 Ahaus
Germany
Phone: +49 2561 686-0
Fax: +49 2561 686-39

Flowserve Pte. Ltd.
12 Tuas Avenue 20
Republic of Singapore 638824
Phone: 65 862 3332
Fax: 65 862 2800

Printed in U.S.A.
August 2001
© Flowserve Corporation